



V 1.1 - 082024

PeopleLink PVC 50WS Cascade


[Watch Video](#)


PeopleLink PVC 50WS Cascade is a portable, digital wireless conference microphone for conference and board rooms. It can be easily connected to a laptop or PC through USB ports. Features like echo cancellation and noise reduction suppress unwanted background noise and echo for crystal-clear audio during video conferencing.

Key Features

- **Digital wireless cascade conference units:** Permits meetings to be managed with complete control and reliability.
- **Omni directional microphone:** These microphones can pick up sound equally from all directions.
- **Built in AEC, AGC and ANS:** Acoustic Echo Cancellation, Automatic Gain Control, and Acoustic Noise Suppression
- **OTA:** Up to 5 Mbps over-the-air (OTA) data rate



General Specifications

I/O

Interface : USB 2.0 (full), 3.5mm out

Frequency Range : 2.400 GHz~2.4835 GHz.

OTA : 5 or 2 Mbps Over-the-Air Data Rate

Phone Set Features

Keypad Flash : Microphone zone selection, Microphone Mute

User Interface

USB Nos. : 1

Frequency Range : USB 2.0 B Type

Mute Indicators and Number : Yes

Audio Technology

DSP-based Echo Cancellation : Yes

Audio Features

Automatic Level Control : < 18dB

Noise Reduction : < 16dB

Power Consumption : 2.5W

Frequency Range : 2,400 ~ 2,483 GHz

Audio Input : 2.5W

Enhanced Audio Features

Automatic Echo Cancellation : Yes

Automatic Gain Control : Yes

Noise Reduction : Yes

Full Duplex : Yes

Non Linear Processing : Yes

Automatic Level Control : Yes

Recommended Room Conditions

Reverberation Time : <0.5 seconds

Noise Level : <48 dBA

Electrical

Power Operating : USB bus powered (DC 5V/500mA)

Temperature : 0°C to 40°C

Environmental Humidity : 20-85% (RH)

Packing Information

USB Cable, Host and antenna, Wireless Mics, Power adapters, Audio cables, User manual




Application

Room type : Board room or conference room

Room size : 40ft x 30ft


Capacity Table Shape : 10 to 24 seater
(Recommended for Oval or U shape table)

Application Scenarios

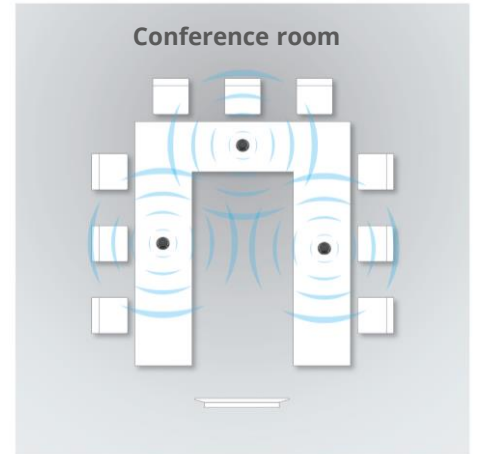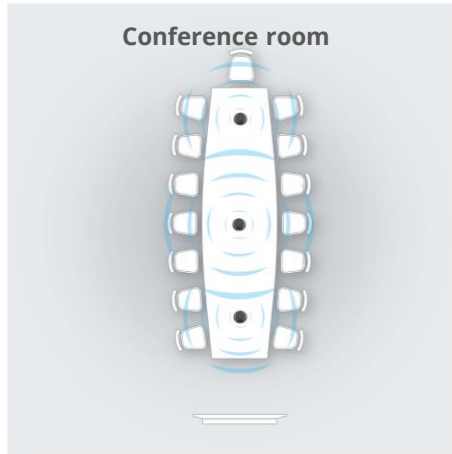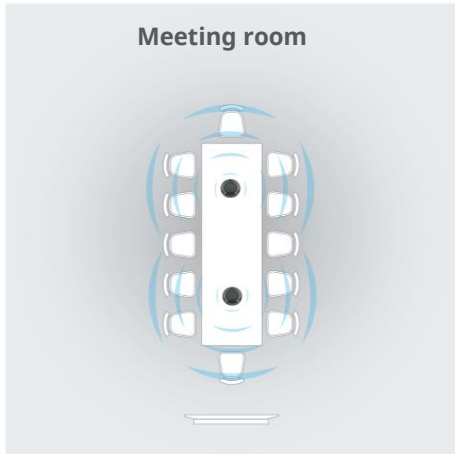

Disclaimer:- Room setup diagrams provided for reference only. Actual room setup and size may vary as per requirements.

Connectivity

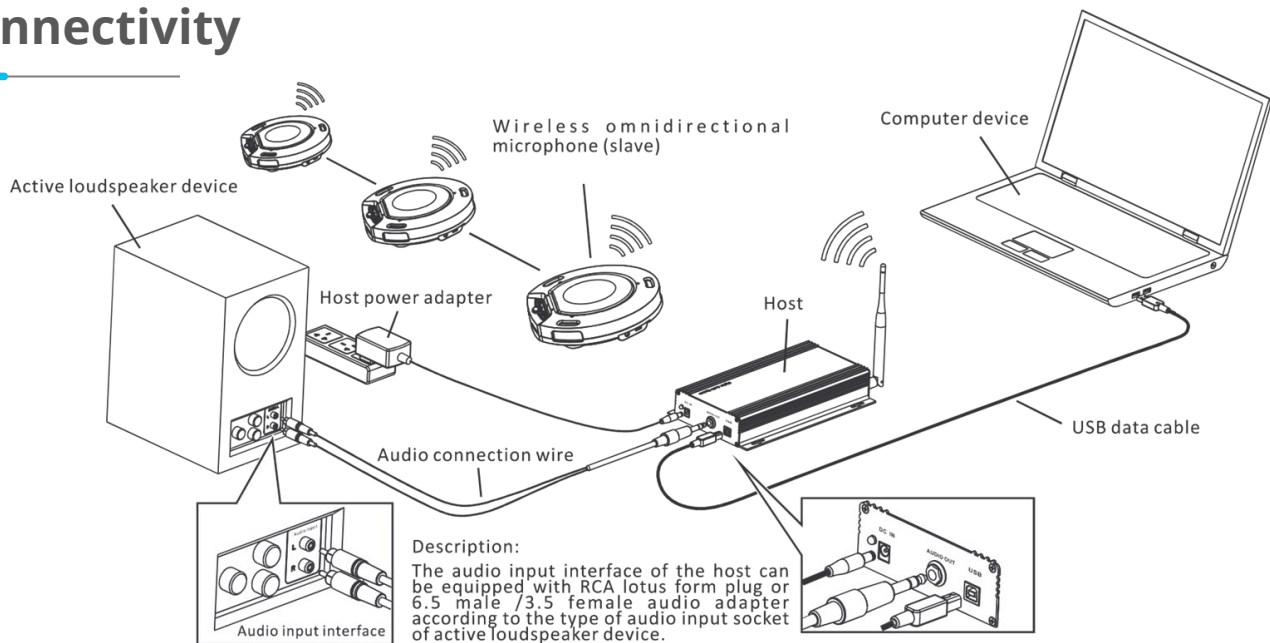

Ordering Information

PeopleLink PVC 50WS 2 Cascade

: **PPU-PVC-AD-50WS-2C**

PeopleLink PVC 50WS 3 Cascade

: **PPU-PVC-AD-50WS-3C**

LEARN MORE

For more information on **PVC 50WS Cascade** [Click Here](#)

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad,
Telangana 500081, **India**
Phone: +91 9100123013
Email: vc@peoplelinkvc.com

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

UAE: +971 4 3339082
Canada: +1 647-945-7373
Malaysia: +(6)018-2872188
New Zealand: +64-9-802-4666
Africa: +254 722 619 314

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com