



V 1.1.1 - 082024

PeopleLink UVC 25



PeopleLink UVC 25 speakerphones are used in board room and conference rooms. They can be easily connected with VC peripherals through USB wire. The omni-directional in-built microphones helps in capturing 360 degree audio within a room and delivers 85 dB of clear output without any background noise or echoes.

Product Features

- Easy to carry, small and medium-sized meetings will be launched at any time
- HD, full duplex audio solution
- Microphone dynamic speech enhancement technology
- Adaptive high-definition amplification technology
- The 3.5mm interface can be used for docking mobile phones or other analog devices.
- Support USB Type C
- Low power consumption design
- 360 degree omni directional pickup, plug and play
- The inductive button design is more dust-proof and more durable.
- **Applicable scenarios:** personal office for business people, small meeting rooms, carry-on travel, etc.
- **Plug and play:** Portable USB omnidirectional microphone (Speaker Phone), which can be quickly connected to a computer or mobile phone via Bluetooth or USB to join the conference, simple and convenient, plug and play.

Product Features

- **Microphone array:** Built-in four-microphone array, 360° omnidirectional pickup, full-duplex audio technology, can better pick up and call at a long distance, more accurate listening position, intelligent noise reduction, automatic gain, echo cancellation.
 - Support for emergency power failure of mobile phones and other devices via USB, reverse charging, multiple circuit protection, and energy at your fingertips.
 - The bar-shaped RGB indicator light, with a variety of colors, allows users to easily identify the current power, volume, incoming call, mute and other working status of the product, and the operation is convenient and simple.
 - Small and exquisite appearance, easy to put in your pocket, convenient to carry.

General Specifications

microphone

Distance : 6m

Frequency response : 50-16900 Hz

Directivity : Omnidirectional

Speaker

Frequency response : 20-20kHz

Volume : 85dBA

Audio frequency

Full duplex echo cancellation : Support

Noise suppression : Support

Gain control : Support

Echo tail length : 300ms

Connection mode

Network : 1 x USB Type C Data Communication

1 x 3.5mm audio interface

Key : Induction button

Warranty

1 year warranty

Environment condition

Power supply : USB: 5V DC @ 450 mA Maximum

Rechargeable battery : NA

Support operation : Windows XP/Vista/7/8/10

Working temperature : 0°-40°C

Storage temperature : -30°-55°

Relative humidity : 20-85% (non-condensing)

Meeting capacity

Covering area : 15-30m²

Number of participants: 6-12 person


Packing

Telephone size (R x H) : 75mm x 30mm

Weight : 0.48kg

Packing catalogue : Quick User Guide, USB Cable Omnidirectional microphone

Application Scenarios

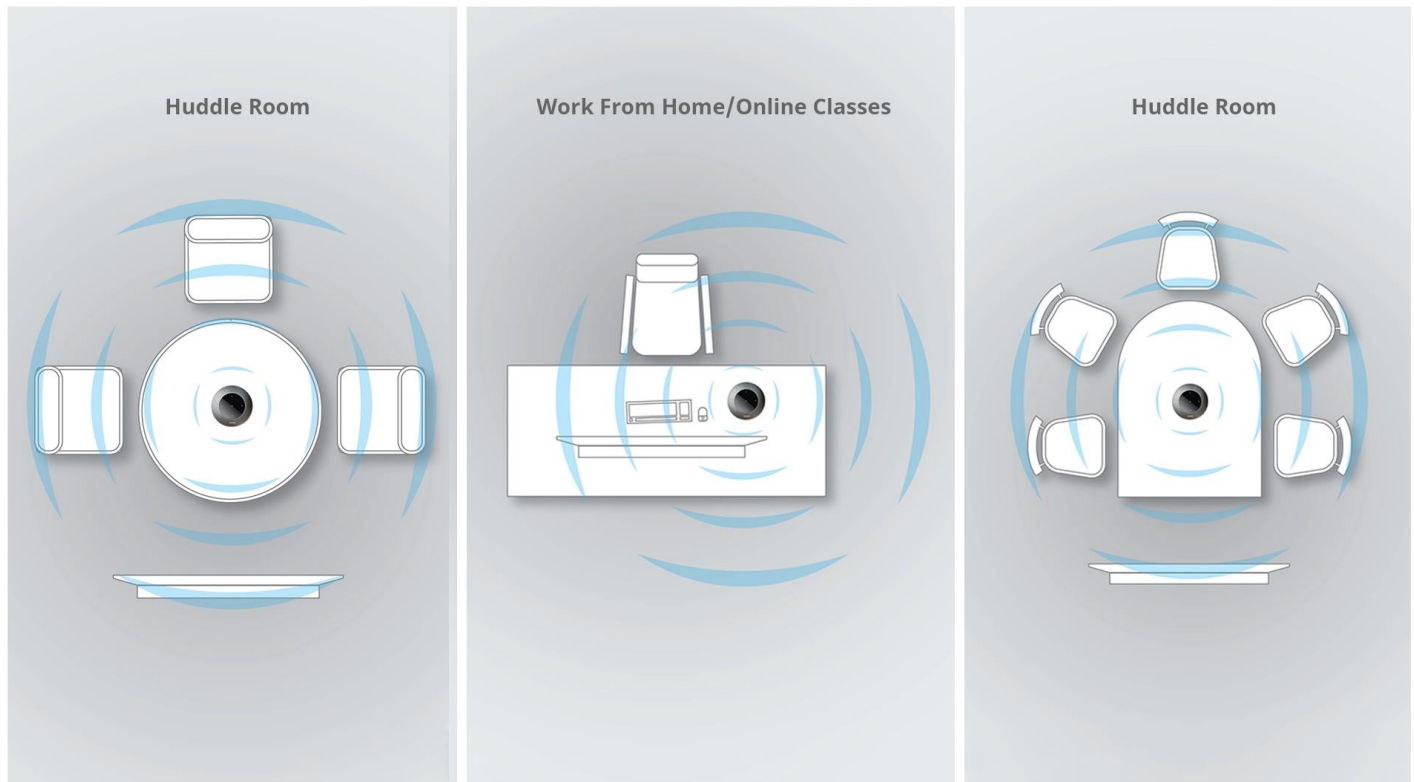

Disclaimer:- Room setup diagrams are provided for reference only. Actual room setup and size may vary as per requirements.

Ordering Information

PeopleLink UVC 25 : **PPU – PVC – UVC - 25**

LEARN MORE

For more information on **PeopleLink UVC 25** [Click Here](#)

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad,
Telangana 500081, **India**
Phone: +91 9100123013
Email: vc@peoplelinkvc.com

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

UAE: +971 4 3339082
Canada: +1 647-945-7373
Malaysia: +(6)018-2872188
New Zealand: +64-9-802-4666
Africa: +254 722 619 314

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com