



PeopleLink Speaker Track Pro

key Features


- 1/2.8" CMOS, 2.14MP
- 12x optical zoom, up to 72.5° FoV
- Simultaneously output 3G-SDI, HDMI, Ethernet, up to 1080P60 resolution
- Support H.264 / H.265 video compression
- Implemented with both audio positioning body recognition technologies, it can precisely frame the speaker(s)
- Automatically switch between close-up image for speaker(s) and wide-angle image for all attendees
- Built-in image according to meeting scenarios



Watch Video



PeopleLink Speaker Track camera helps to achieve an intelligent meeting experience, and it is implemented with both audio positioning and intelligent video analysis technologies. It can automatically switch between a close-up image and a full-view image to frame the speaker(s). This frees up camera operation during a meeting and enables meeting attendees to focus more on discussion.

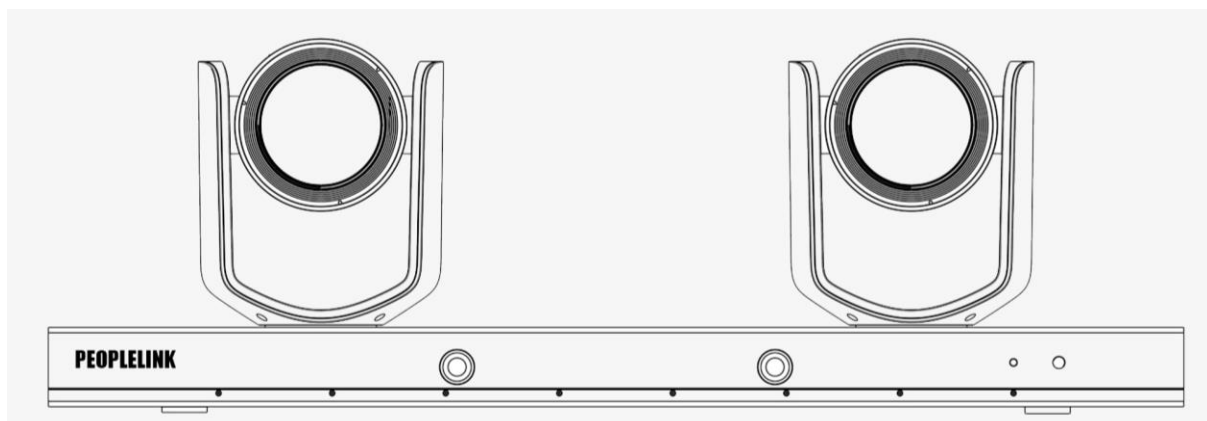

General Specifications

Camera

Image Sensor : 1/2.8"CMOS, 2.14MP
Signal Format (SDI) : 1080P60, 1080P50, 1080P30, 1080P25, 1080I60, 1080I50, 720P60, 720P50
Focal length : 3.9mm-46.8mm
Iris : F1.6-F2.8
Optical Zoom : 12x
Digital Zoom : 12x
Field of View : 72.5°-6.3°
Focus : Auto, Manual, PTZ Push, One Push
Min. Illumination : 0.5 Lux (Color), 0.1 Lux (B/W)
Shutter Speed : 1/25-1/10,000s
AGC : Auto/Manual
White Balance : Auto, Indoor, Outdoor, One Push Manual, Auto Track
AE Control : Auto, Manual, Shutter Priority, Iris Priority
S/N : ≥50dB
DNR : 2D/3D
BLC : Support
Pan Range : 90°~+90°
Tilt Range : -30°~+90°
Pan Speed : 0.1°~120°/s
Tilt Speed : 0.1°~80°/s
Preset Number : 255
OSD : Yes
Image Flip : Yes

Network


Max. Image Size : 1920 × 1080 @60 fps
Video Compression : H.265,H.264
Audio Compression : AAC
Protocol : HTTP, RTSP, RTMP, RTP, TCP, UDP, ONVIF
Dual Stream : Support

Interface




Video Output : 1 × HDMI Interface, 1×3G-SDI Interface
Audio Input : 2 × LINE IN, including one channel with EC
Audio Output : 1 × LINE OUT
Network Interface : 1 × 10M/100M
USB Interface : 1 × USB2.0
Control Interface : 1 × RS-232

General Specifications

Control Protocol : VISCA, PELCO-P, PELCO-D
Address : 0~63
Power Supply : DC12V
Power Consumption : <50W
Working Temp : 0°C ~ + 40°C
Storage Temp : -20°C ~ +60°C
Dimension (LxWxH) : 500 mm x 162mm x 137mm
Weight : 3kg

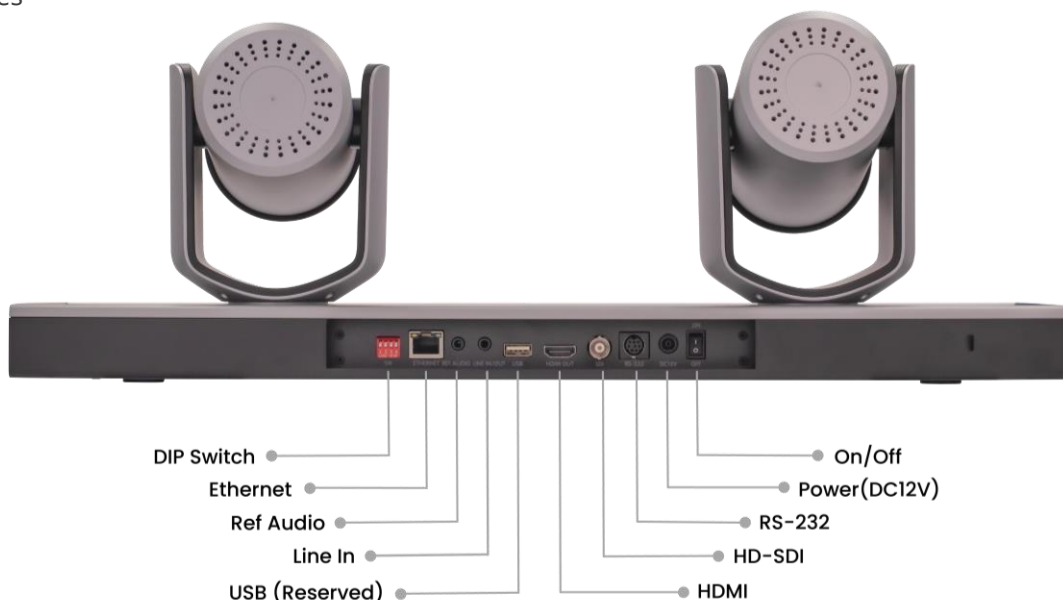


Application Scenarios

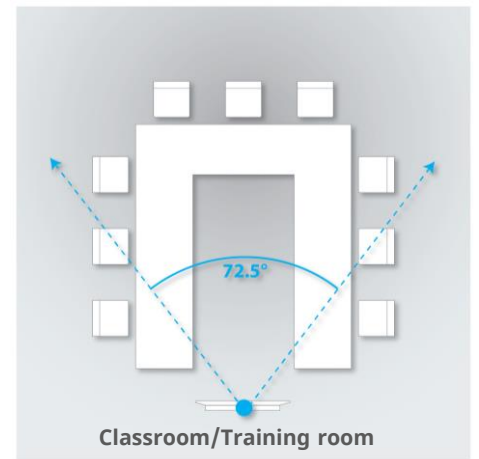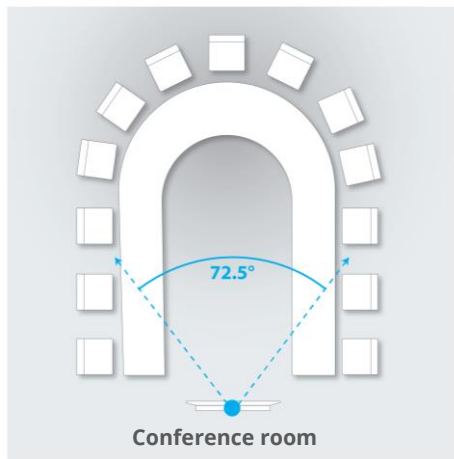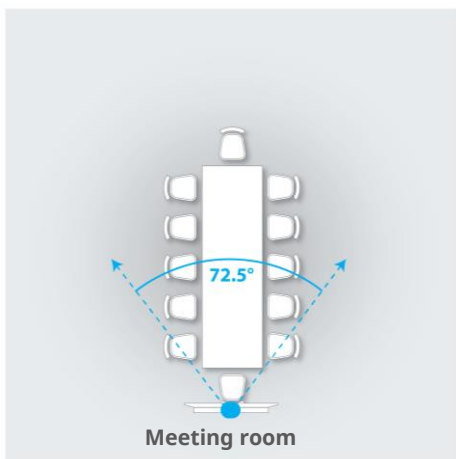

Disclaimer:- Room setup diagrams are provided for reference only. Actual room setup and size may vary as per requirements.

Connectivity

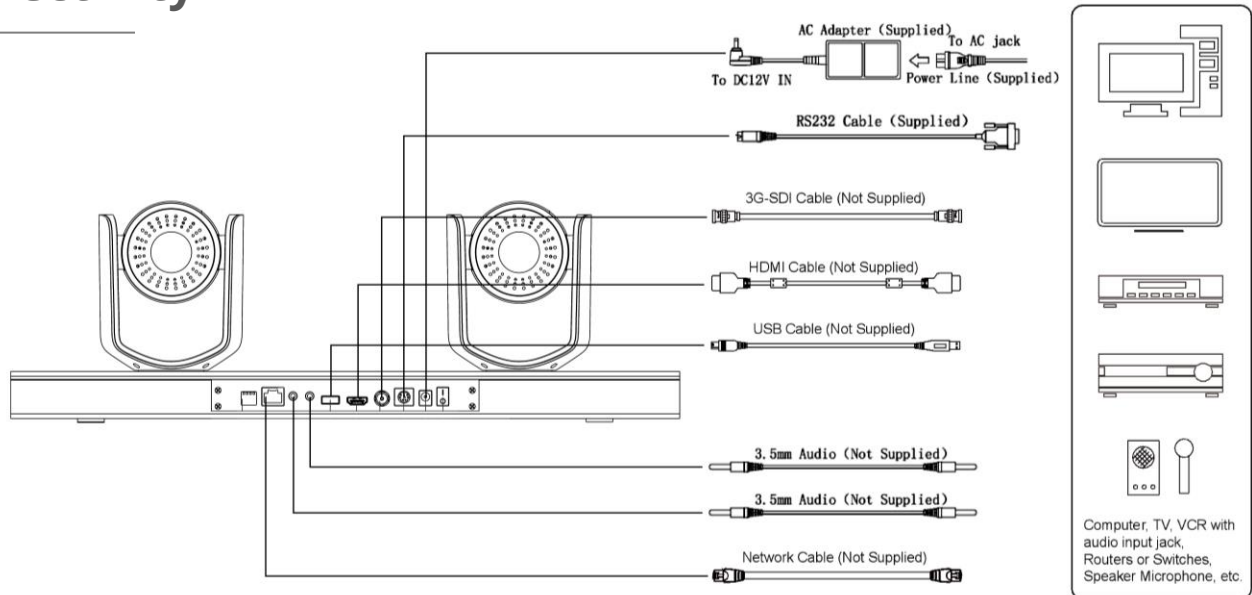

Ordering Information

Speaker Track Pro Camera
Dual motorized PTZ Camera with HDMI Capture Card

: **PEP-PIS-STP**

Speaker Track Standard Camera
Dual motorized PTZ Camera without HDMI Capture Card

: **PEP-PIS-STS**

LEARN MORE

For more information on Speaker Track Pro [Click Here](#)

SALES AND INQUIRIES

Global Headquarters

Q3-A3, 10th Floor Cyber Towers,
HITEC City, Hyderabad,
Telangana 500081, **India**
Phone: +91 9100123013
Email: vc@peoplelinkvc.com

International Contact Numbers

USA: +1 669-696-8383
Australia: +61 370 037070
France: +33 6 80 75 26 42
Middle East: +966 5300 19292
UK: +44 20 4571 5454

UAE: +971 4 3339082
Canada: +1 647-945-7373
Malaysia: +(6)018-2872188
New Zealand: +64-9-802-4666
Africa: +254 722 619 314

Tech Support

Toll Free: 1800 208 3399
customersupport@peoplelinkvc.com